



Technical Catalogue



FLF Series

Stainless Steel Chemical Pump

Use

The pumps are suitable for transporting clean media which are non-aggressive to stainless steel 304 or 316L.

Performance limits

The use of the pump refers to the performance table range to prevent the motor overload, causing danger.

EPDM rubber / F46 fluorine plastic

Fluorine rubber / silicon carbide / alloy

Mechanical seal:

Transmission medium temperature:

20 °C ~ +120 °C

Mainly applied on

Food processing

Pharmaceutical Chemicals


The electroplating and dyeing

Sewage treatment

Environmental Engineering



The product diagram

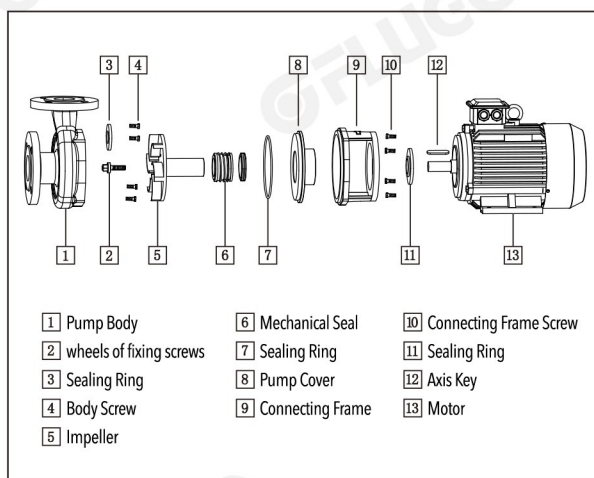

Model Description

FLF (2) (B) 50-25-D-SH

D. single-phase electrode
unsigned three-phase motor

The designed head(m)

Diameter of suction(mm)

Optional YB3 flameproof motor

Optional YE3 high efficiency
energy saving motor

Stainless steel corrosionresistant
pump

Technical parameter list










2900r/min

Model	Flow Q		Head H (m)	Power (KW)	Revn (r/min)	Calider (mm)		Voltage (V)	(NPSH) (m)
	m ³ /h	L/s				□In	□Out		
FLF25-8/D	2.5	0.7	10	0.25	2900	25	20	380/220	4.0
	4	1.1	8						
	7.5	2	3						
FLF40-13/D	4	1.1	15	0.55	2900	40	25	380/220	3.5
	6	1.67	13						
	13	4.44	5						
FLF40-13A/D	4.5	1.25	15	0.75	2830	40	25	380/220	3.5
	7.5	2.08	13						
	15	4.16	6						
FLF50-18/D/S	3.5	0.9	22	1.5	2840	50	40	380/220	3.5
	13	4.44	18						
	18	5	14						
FLF50-22/D/S	9.5	2.63	26	2.2	2840	50	40	380/220	3.5
	19	5.28	22						
	23	6.38	18						
FLF50-25/D/S	14	3.88	30	3	2870	50	40	380/220	3.5
	23	6.38	25						
	27.5	7.63	20						
FLF65-15	14	5	16	1.5	2890	65	50	380/220	3.5
	22	6.1	15						
	30	8.3	12						
FLF65-18	22	6.1	19	2.2	2890	65	50	380	3.5
	25	6.9	18						
	31	8.6	15						
FLF65-22	20	5.6	25	3	2890	65	50	380	3.5
	25	6.9	22						
	30	8.5	18						
FLF65-28	18	5	31	4	2890	65	50	380	3.5
	25	6.9	28						
	32	8.9	24						
FLF65-32	15	4.5	36	5.5	2900	65	50	380	3.5
	25	6.9	32						
	32	8.9	27						
FLF65-38	15	4.5	42	7.5	2900	65	50	380	3.5
	25	6.9	38						
	32	8.9	31						
FLF80-16	28	7.8	18	3	2900	80	50	380	3.5
	36	10	16						
	41	11.4	14						
FLF80-20	25	6.9	25	4	2890	80	50	380	3.5
	42	11.7	22						
	50	13.9	20						
FLF80-26	42	11.7	31	5.5	2900	80	50	380	3.5
	47	13	28						
	56	15.6	25						
FLF80-30	40	11.1	36	7.5	2900	80	50	380	3.5
	50	13.9	32						
	60	16.7	29						
FLF80-22(I)	55	15.3	23	5.5	2900	80	80	380	3.5
	58	16.1	22						
	70	19.4	18						
FLF80-30(I)	52	14.4	32	7.5	2900	80	80	380	3.5
	60	16.7	30						
	74	20.6	26						
FLF80-40	39	10.8	42	11	2930	80	80	380	3.5
	50	13.9	40						
	74	20.6	35						
FLF80-50	35	9.7	54	15	2930	80	80	380	3.5
	50	13.9	50						
	60	16.6	48						
FLF100-14	52	14.4	16	4	2890	100	80	380	3.5
	65	18	14						
	78	21.6	12						
FLF100-18	71	19.7	20	5.5	2900	100	80	380	3.5
	85	23.6	18						
	96	26.6	15						
FLF100-20	86	23.8	23	7.5	2900	100	80	380	3.5
	90	25	20						
	103	28.6	16						
FLF100-23	95	26.3	28	11	2930	100	80	380	3.5
	105	29.2	23						
	122	33.9	20						
FLF100-28	100	27.8	32	15	2930	100	80	380	3.5
	110	30.6	28						
	125	34.7	24						
FLF100-32	90	25	36	18.5	2930	100	80	380	3.5
	110	30.5	32						
	130	36.1	26						
FLF125-15	76	21	18	7.5	2900	125	100	380	3.5
	120	33.3	15						
	136	37.8	12						
FLF125-20	80	22.2	23	11	2930	125	100	380	3.5
	130	38.9	20						
	152	42.2	17						
FLF125-22	84	23.3	25	15	2930	125	100	380	3.5
	140	38.9	22						
	168	46.7	19						
FLF125-28	90	25	32	18.5	2930	125	100	380	3.5
	150	41.7	28						
	180	50	23						
FLF125-32	96	26.7	37	22	2930	125	100	380	3.5
	160	44.4	32						
	192	55.3	27						




Technical parameter list

									1450r/min
Model	Flow Q		Heab H (m)	Power (KW)	Revn (r/min)	Calider (mm)		Voltage (V)	(NPSH) (m)
	m³/h	L/s				In	□Out		
FLF125-20	100	27.8	23	15	1480	125	125	380	4.0
	160	44.4	20						
	200	55.6	17						
FLF125-20A	90	25	20	11	1450	125	125	380	4.2
	150	41.7	17						
	185	51.4	15						
FLF125-32	100	27.8	35	22	1450	125	125	380	5.9
	160	44.4	32						
	200	55.6	28						
FLF125-32A	94	26.1	30	18.5	1480	125	125	380	3.7
	150	41.7	28						
	190	52.8	24						
FLF125-50	100	27.8	53	37	1480	125	125	380	5.6
	160	44.4	50						
	200	55.6	46						
FLF125-50A	94	26.1	46	30	1480	125	125	380	5.3
	150	41.7	44						
	190	52.8	40						
FLF150-20	120	33.3	22	18.5	1450	150	150	380	5.0
	200	55.6	20						
	240	66.7	18						
FLF150-20A	115	31.9	20	15	1450	150	150	380	3.0
	190	52.8	17						
	225	62.5	15						
FLF150-20B	105	29.2	16	11	1450	150	150	380	3.0
	175	48.6	14						
	210	58.3	12						
FLF150-32	120	33.3	34	30	1450	150	150	380	2.5
	200	55.6	32						
	240	66.7	29						
FLF150-32A	115	31.9	29	22	1450	150	150	380	3.5
	190	52.8	28						
	225	62.5	25						
FLF150-32B	100	27.8	25	18.5	1450	150	150	380	3.5
	175	48.6	24						
	210	58.3	21						
FLF150-50	120	33.3	53	45	1450	150	150	380	3.5
	200	55.6	50						
	240	66.7	46						
FLF150-50A	125	34.7	46	37	1450	150	150	380	3.5
	190	52.8	44						
	225	62.5	40						
FLF150-50B	105	29.2	40	30	1450	150	150	380	3.5
	175	48.6	37						
	210	58.3	34						
FLF200-20	120	33.3	22	18.5	1450	200	200	380	3.0
	200	55.6	20						
	245	68	17						
FLF200-20A	115	31.9	19	15	1450	200	200	380	3.0
	190	52.8	17						
	225	62.5	15						
FLF200-32	120	33.3	34	30	1450	200	200	380	3.5
	200	55.6	32						
	240	68	29						
FLF200-32A	115	31.9	29	22	1450	200	200	380	3.5
	190	52.8	28						
	225	62.5	25						
FLF200-20(I)	240	66.7	22	30	1450	200	200	380	4.0
	400	111.1	20						
	480	133.3	16						
FLF200-20(I)A	220	61.1	17	22	1450	200	200	380	4.0
	360	100	16						
	435	120.8	13						
FLF200-20(I)B	225	62.5	14	18.5	1450	200	200	380	4.0
	320	88.9	13						
	420	116.7	8						
FLF200-32(I)	240	66.7	37	55	1450	200	200	380	4.0
	400	111.1	32						
	480	133.3	28						
FLF200-32(I)A	220	61.1	31	45	1450	200	200	380	4.0
	375	104.1	28						
	440	122.2	24						
FLF200-32(I)B	205	56.9	26	37	1450	200	200	380	4.0
	345	95.8	24						
	410	113.9	20						
FLF200-50	280	77.8	54	75	1450	200	200	380	4.0
	400	111	50						
	520	144.4	39						
FLF200-50A	242	67.2	42	55	1450	200	200	380	4.0
	364	101	38						
	450	125	32						
FLF200-50B	224	62.2	35	45	1450	200	200	380	4.0
	320	88.9	32						
	416	115.5	25						
FLF250-20	350	97.2	22	45	1450	250	250	380	5.0
	550	152.8	20						
	650	180.5	16						
FLF250-20A	300	83.3	18	37	1450	250	250	380	5.0
	500	138.9	17						
	600	166.7	14						
FLF250-20B	300	83.3	14	22	1450	250	250	380	5.0
	500	138.9	13						
	600	166.7	11						
FLF250-32	350	97.2	33	75	1450	250	250	380	5.0
	500	138.9	32						
	600	166.7	28						
FLF250-32A	300	83.3	30	55	1450	250	250	380	5.0
	500	138.9	28						
	600	166.7	24						
FLF250-32B	260	72.2	25	45	1450	250	250	380	5.0
	450	125	24						
	520	144.4	20						

Performance graph

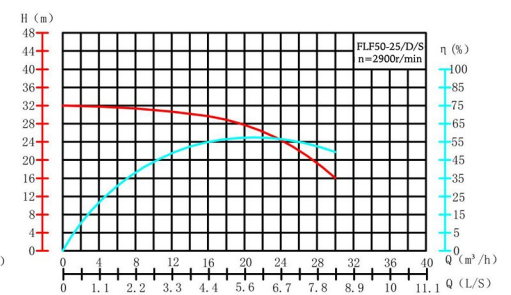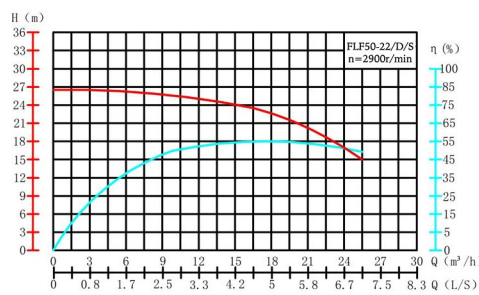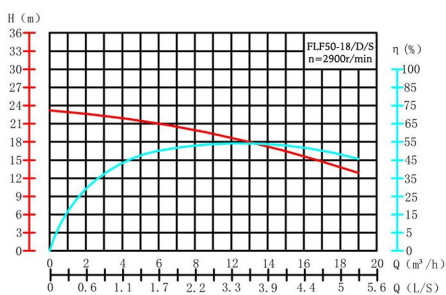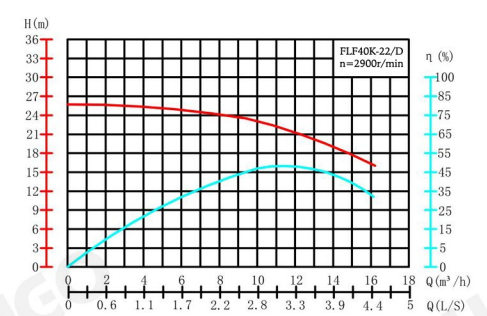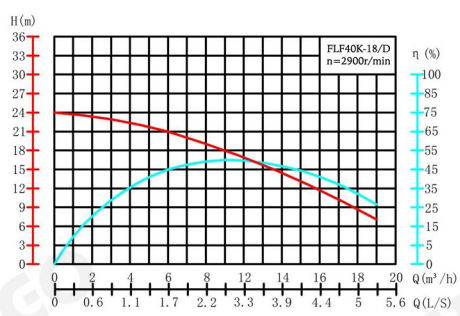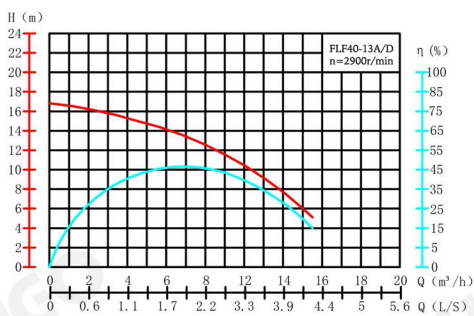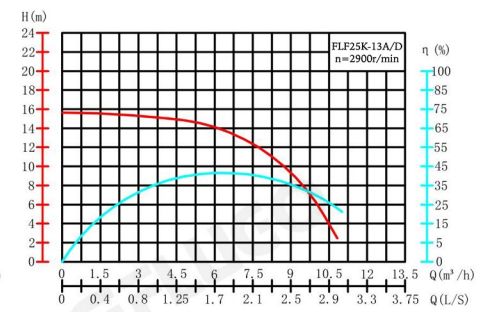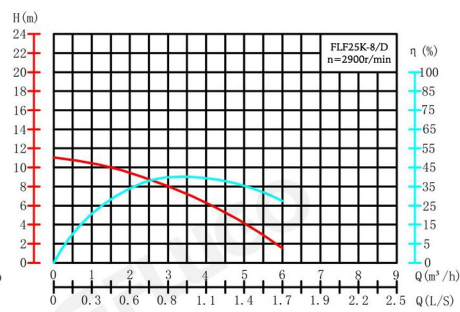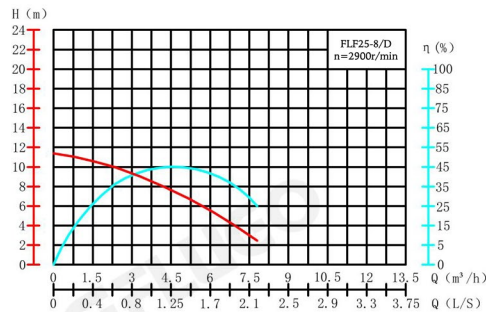

FLF straight league centrifugal pump installation size figure

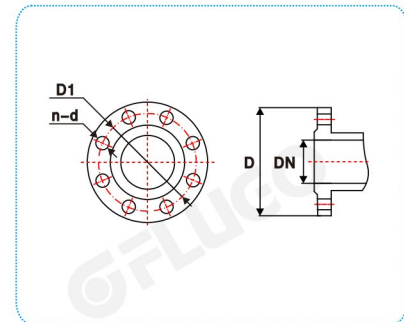
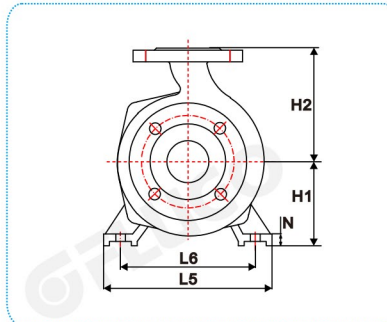
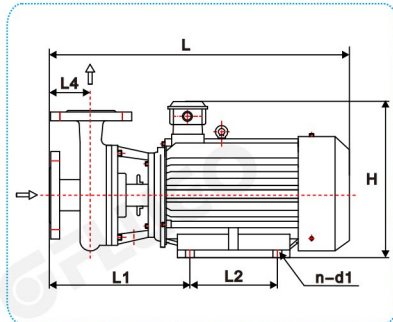


Installation size list

(mm) 2900r/min

Model	Outline dimensions											Import and export flange dimensions								Power (KW)
	L	L1	L2	L4	L5	L6	n-d1	H	H1	H2	N	DN	D1	D	n-d	DN	D1	D	n-d	
FLF25-8/D	305	140	80	38	120	100	4-Φ7	130	63	90	8	G1				G $\frac{3}{4}$				0.25
FLF40-13/D	330	160	90	52	138	112	4-Φ7	170	71	110	10	G1 $\frac{1}{2}$				G1				0.55
FLF40-13A/D	330	160	90	52	138	112	4-Φ7	170	71	110	10	G1 $\frac{1}{2}$				G1				0.75
FLF50-18/D	445	210	100	70	185	140	4-Φ10	240	90	135	13	50	110	140	4-Φ14	40	100	130	4-Φ14	1.5
FLF50-18S	430	210	100	50	185	140	4-Φ10	240	90	135	13	G2				G1 $\frac{1}{2}$				1.5
FLF50-22/D	470	230	125	67	185	140	4-Φ10	240	90	135	13	50	110	140	4-Φ14	40	100	130	4-Φ14	2.2
FLF50-22S	470	230	125	50	185	140	4-Φ10	240	90	135	13	G2				G1 $\frac{1}{2}$				2.2
FLF50-25/D	480	230	140	67	205	160	4-Φ12	265	100	135	13	50	110	140	4-Φ14	40	100	130	4-Φ14	3
FLF50-25S	470	230	140	50	205	160	4-Φ12	265	100	135	13	G2				G1 $\frac{1}{2}$				3
FLF65-15	460	232	100	75	185	140	4-Φ10	240	90	175	13	65	130	160	4-Φ14	50	110	140	4-Φ14	1.5
FLF65-18	470	232	125	75	185	140	4-Φ10	240	90	175	13	65	130	160	4-Φ14	50	110	140	4-Φ14	2.2
FLF65-22	480	232	140	75	205	160	4-Φ12	265	100	175	13	65	130	160	4-Φ14	50	110	140	4-Φ14	3
FLF65-28	500	235	140	75	230	190	4-Φ12	300	112	175	15	65	130	160	4-Φ14	50	110	140	4-Φ14	4
FLF65-32	550	250	140	75	260	215	4-Φ12	340	132	175	15	65	130	160	4-Φ14	50	110	140	4-Φ14	5.5
FLF65-38	550	250	140	75	260	215	4-Φ12	340	132	175	15	65	130	160	4-Φ14	50	110	140	4-Φ14	7.5
FLF80-16	540	270	140	85	205	160	4-Φ12	310	100	185	13	80	150	185	4-Φ14	50	110	140	4-Φ14	3
FLF80-20	560	272	140	85	230	190	4-Φ12	310	112	185	15	80	150	185	4-Φ14	50	110	140	4-Φ14	4
FLF80-26	600	276	140	85	260	215	4-Φ12	340	132	185	15	80	150	185	4-Φ14	50	110	140	4-Φ14	5.5
FLF80-30	600	276	140	85	260	215	4-Φ12	340	132	185	15	80	150	185	4-Φ14	50	110	140	4-Φ14	7.5
FLF80-22(I)	630	325	140	100	260	215	4-Φ12	340	132	210	15	80	160	200	8-Φ18	80	160	200	8-Φ18	5.5
FLF80-30(I)	630	325	140	100	260	215	4-Φ12	340	132	210	15	80	160	200	8-Φ18	80	160	200	8-Φ18	7.5
FLF80-40	750	360	210	100	320	254	4-Φ16	410	160	210	20	80	160	200	8-Φ18	80	160	200	8-Φ18	11
FLF80-50	750	360	210	100	320	254	4-Φ16	410	160	210	20	80	160	200	8-Φ18	80	160	200	8-Φ18	15
FLF100-14	570	270	140	105	230	190	4-Φ12	300	112	210	15	100	170	200	4-Φ16	80	150	185	4-Φ16	4
FLF100-18	605	300	140	105	260	210	4-Φ12	340	132	210	15	100	170	200	4-Φ16	80	150	185	4-Φ16	5.5
FLF100-20	605	300	140	105	260	210	4-Φ12	340	132	210	15	100	170	200	4-Φ16	80	150	185	4-Φ16	7.5
FLF100-23	740	330	210	105	320	254	4-Φ16	340	160	210	20	100	170	200	4-Φ16	80	150	185	4-Φ16	11
FLF100-28	740	330	210	105	320	254	4-Φ16	340	160	210	20	100	170	200	4-Φ16	80	150	185	4-Φ16	15
FLF100-32	830	330	254	105	320	254	4-Φ18	450	160	210	20	100	170	200	4-Φ16	80	150	185	4-Φ16	18.5
FLF125-15	700	270	140	100	260	210	4-Φ12	340	132	210	15	125	200	230	4-Φ16	100	170	198	4-Φ16	7.5
FLF15-20	740	330	210	100	320	254	4-Φ16	410	160	210	20	125	200	230	4-Φ18	100	170	198	4-Φ16	11
FLF125-22	740	330	210	100	320	254	4-Φ16	410	160	210	20	125	200	230	4-Φ18	100	170	198	4-Φ16	15
FLF125-28	830	330	254	100	320	254	4-Φ18	450	160	210	20	125	200	230	4-Φ18	100	170	198	4-Φ16	18.5
FLF125-32	830	360	254	100	355	279	4-Φ22	480	180	210	20	125	200	230	4-Φ18	100	170	198	4-Φ16	22

↓ **FLF straight centrifugal pump installation size appearance figure to be base**

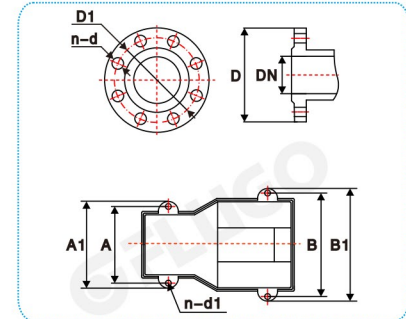
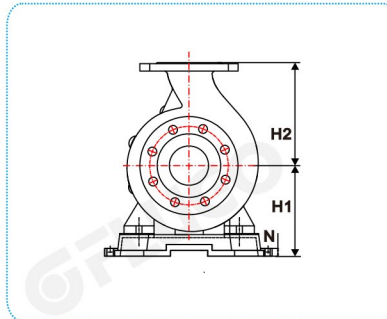
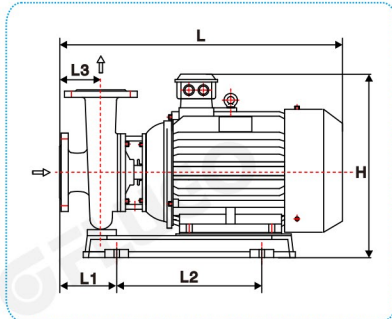


↓ **Installation size list**

(mm) 2900r/min

Model	Outline dimensions													Import and export flange dimensions								Power (KW)
	L	L1	L2	L3	A	A1	B	B1	n-d1	N	H	H1	H2	DN	D1	D	n-d	DN	D1	D	n-d	
FLF50-18/D	445	100	210	70	220	270	270	320	4-φ6	20	300	150	135	50	110	140	4-φ14	40	100	130	4-φ14	1.5
FLF50-18S	430	100	210	50	220	270	270	320	4-φ6	20	300	150	135	G2	110	140	4-φ14	G1½	100	130	4-φ14	1.5
FLF50-22/D	470	120	210	67	220	270	270	320	4-φ6	20	300	150	135	50	110	140	4-φ14	40	100	130	4-φ14	2.2
FLF50-22S	470	120	210	50	220	270	270	320	4-φ6	20	300	150	135	G2	110	140	4-φ14	G1½	100	130	4-φ14	2.2
FLF50-25/D	480	120	210	67	220	270	270	320	4-φ6	20	320	160	135	50	110	140	4-φ14	40	100	130	4-φ14	3
FLF50-25S	470	120	210	50	220	270	270	320	4-φ6	20	320	160	135	G2	110	140	4-φ14	G1½	100	130	4-φ14	3
FLF65-15	460	120	210	75	220	270	270	320	4-φ6	20	300	150	175	65	130	160	4-φ14	50	110	140	4-φ14	1.5
FLF65-18	470	120	210	75	220	270	270	320	4-φ6	20	300	150	175	65	130	160	4-φ14	50	110	140	4-φ14	2.2
FLF65-22	480	120	210	75	220	270	270	320	4-φ6	20	320	160	175	65	130	160	4-φ14	50	110	140	4-φ14	3
FLF65-28	500	55	270	75	250	290	310	350	4-φ6	25	375	186	175	65	130	160	4-φ14	50	110	140	4-φ14	4
FLF65-32	550	70	275	75	250	290	350	400	4-φ6	25	400	205	175	65	130	160	4-φ14	50	110	140	4-φ14	5.5
FLF65-38	550	70	275	75	250	290	350	400	4-φ6	25	400	205	175	65	130	160	4-φ14	50	110	140	4-φ14	7.5
FLF80-16	540	130	210	85	220	270	270	320	4-φ6	20	320	160	185	80	150	185	4-φ14	50	110	140	4-φ14	3
FLF80-20	560	90	270	85	250	290	310	350	4-φ6	25	375	186	185	80	150	185	4-φ14	50	110	140	4-φ14	4
FLF80-26	600	95	275	85	250	290	350	400	4-φ6	25	400	205	185	80	150	185	4-φ14	50	110	140	4-φ14	5.5
FLF80-30	600	95	275	85	250	290	350	400	4-φ6	25	400	205	185	80	150	185	4-φ14	50	110	140	4-φ14	7.5
FLF80-22(I)	630	135	275	100	250	290	350	400	4-φ6	25	417	205	210	80	160	200	8-φ18	80	160	200	8-φ18	5.5
FLF80-30(I)	630	135	275	100	250	290	350	400	4-φ6	25	417	205	210	80	160	200	8-φ18	80	160	200	8-φ18	7.5
FLF80-40	750	168	365	100	300	330	410	450	4-φ18	25	470	220	210	80	160	200	8-φ18	80	160	200	8-φ18	11
FLF80-50	750	168	365	100	300	330	410	450	4-φ18	25	470	220	210	80	160	200	8-φ18	80	160	200	8-φ18	15
FLF100-14	570	90	270	105	250	290	310	350	4-φ6	25	375	200	210	100	170	200	4-φ16	80	150	185	4-φ16	4
FLF100-18	605	120	275	105	250	290	350	400	4-φ6	25	400	205	210	100	170	200	4-φ16	80	150	185	4-φ16	5.5
FLF100-20	605	120	275	105	250	290	350	400	4-φ6	25	400	205	210	100	170	200	4-φ16	80	150	185	4-φ16	7.5
FLF100-23	740	140	365	105	300	330	410	450	4-φ18	25	470	220	210	100	170	200	4-φ16	80	150	185	4-φ16	11
FLF100-28	740	140	365	105	300	330	410	450	4-φ18	25	470	220	210	100	170	200	4-φ16	80	150	185	4-φ16	15
FLF100-32	830	145	400	105	300	330	405	450	4-φ18	25	480	220	210	100	170	200	4-φ16	80	150	185	4-φ16	18.5
FLF125-15	700	90	275	100	250	290	350	400	4-φ6	25	400	205	210	125	200	230	4-φ16	100	170	198	4-φ16	7.5
FLF125-20	740	140	365	100	300	330	410	450	4-φ18	25	470	220	210	125	200	230	4-φ18	100	170	198	4-φ16	11
FLF125-22	740	140	365	100	300	330	410	450	4-φ18	25	470	220	210	125	200	230	4-φ18	100	170	198	4-φ16	15
FLF125-28	830	145	400	100	300	330	410	455	4-φ18	25	480	220	210	125	200	230	4-φ18	100	170	198	4-φ16	18.5
FLF125-32	830	145	440	100	350	380	455	470	4-φ18	25	480	220	210	125	200	230	4-φ18	100	170	198	4-φ16	22

↓ **FLF straight centrifugal pump installation size appearance figure to be base**

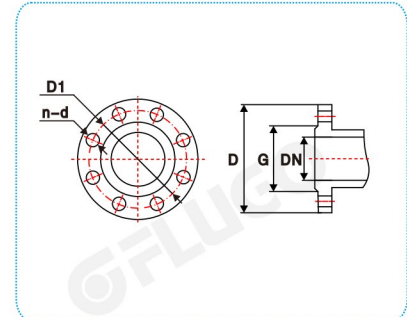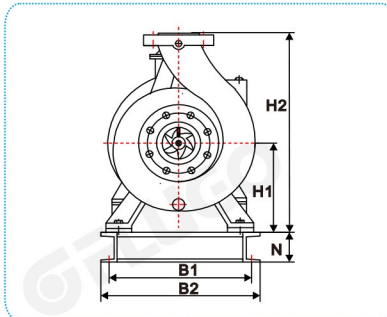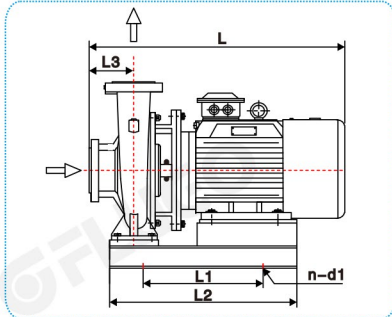

↓ **Installation size list**

(mm) 1400r/min

Model	Outline dimensions										Import and export flange					Power (KW)
	L	L1	L2	L3	H1	H2	B1	B2	N	n-d1	DN	G	D1	D	n-d	
FLF125-20	780	510	560	120	140	300	230	330	120	4-φ18	125	185	210	250	8-φ18	15
FLF125-20A	780	510	560	120	140	300	230	330	120	4-φ18	125	185	210	250	8-φ18	11
FLF125-32	900	580	630	130	160	325	270	370	120	4-φ18	125	185	210	250	8-φ18	22
FLF125-32A	870	570	620	130	160	325	230	330	120	4-φ18	125	185	210	250	8-φ18	18.5
FLF125-50	950	610	720	120	180	360	400	450	120	4-φ18	125	185	210	250	8-φ18	37
FLF125-50A	950	610	720	120	180	360	400	450	120	4-φ18	125	185	210	250	8-φ18	30
FLF150-20	915	580	650	140	250	690	370	410	120	4-φ18	150	210	240	285	12-φ22	18.5
FLF150-20A	895	580	650	140	250	690	370	410	120	4-φ18	150	210	240	285	12-φ22	15
FLF150-20B	850	580	650	140	250	690	370	370	120	4-φ18	150	210	240	285	12-φ22	11
FLF150-32	1025	900	980	150	280	760	470	570	120	4-φ18	150	210	240	285	12-φ22	30
FLF150-32A	950	880	900	150	280	760	520	570	120	4-φ18	150	210	240	285	12-φ22	22
FLF150-32B	910	880	900	150	280	760	520	570	120	4-φ18	150	210	240	285	12-φ22	18.5
FLF150-50	1090	630	800	140	315	815	470	520	120	4-φ18	150	210	240	285	12-φ22	45
FLF150-50A	1060	630	800	140	315	815	470	520	120	4-φ18	150	210	240	285	12-φ22	37
FLF150-50B	1045	630	800	140	315	815	470	520	120	4-φ18	150	210	240	285	12-φ22	30
FLF200-20	915	550	900	165	250	710	380	430	120	4-φ22	200	268	295	340	12-φ22	18.5
FLF200-20A	895	550	900	165	250	710	380	430	120	4-φ22	200	268	295	340	12-φ22	15
FLF200-32	1025	670	1030	160	280	780	470	520	120	4-φ22	200	268	295	340	12-φ22	30
FLF200-32A	950	670	950	160	280	780	470	520	120	4-φ22	200	268	295	340	12-φ22	22
FLF200-20(I)	1035	600	1030	170	280	780	470	520	120	4-φ22	200	268	295	340	12-φ22	30
FLF200-20(I)A	965	600	950	170	280	780	470	520	120	4-φ22	200	268	295	340	12-φ22	22
FLF200-20(I)B	925	600	950	170	280	780	470	520	120	4-φ22	200	268	295	340	12-φ22	18.5
FLF200-32(I)	1155	700	1150	160	315	840	520	570	120	4-φ22	200	268	295	340	12-φ22	55
FLF200-32(I)A	1070	700	1050	160	315	840	520	570	120	4-φ22	200	268	295	340	12-φ22	45
FLF200-32(I)B	1045	700	1050	160	315	840	520	570	120	4-φ22	200	268	295	340	12-φ22	37
FLF200-50	1260	850	1250	170	315	875	520	570	120	4-φ22	200	268	295	340	12-φ22	75
FLF200-50A	1205	850	1200	170	315	855	520	570	120	4-φ22	200	268	295	340	12-φ22	55
FLF200-50B	1105	850	1200	170	315	855	520	570	120	4-φ22	200	268	295	340	12-φ22	45
FLF250-20	1130	640	1130	200	315	870	520	520	140	4-φ22	250	300	355	405	12-φ26	45
FLF250-20A	1103	640	1100	200	315	870	520	520	140	4-φ22	250	300	355	405	12-φ26	37
FLF250-20B	1025	640	1100	200	315	870	520	520	140	4-φ22	250	300	355	405	12-φ26	22
FLF250-32	1220	840	1250	200	325	945	550	550	140	4-φ22	250	300	355	405	12-φ26	75
FLF250-32A	1250	800	1250	200	325	945	520	520	140	4-φ22	250	300	355	405	12-φ26	55
FLF250-32B	1130	800	1130	200	325	945	520	520	140	4-φ22	250	300	355	405	12-φ26	45



Authorized Distributor

FLF series - Chemical Process Pump