

FMD SERIES MAGNETIC PUMP

Product Description

1. Magnetic drive, shaft seal-less design, completely forbids "running, exude, drop, leakage".
2. Using primary raw materials, improves product corrosion resistance and structural strength.
3. Variety of interface, we have flange, union, intubation, maximum to meet customer demand.
4. Modular product and assembly, so the structure is simple, secure and easy to maintain.

Product Number


FMD	F	-25	260	C	C	V	3	5
1	2	3	4	5	6	7	8	9
1	Model	FMD						
2	Material	F-FRPP P-PVDF						
3	Inlet	20-20*20 25-25*25						
4	Power	20:20W 45:45W 65:65W 120:120W 150:150W 260:260W						
5	Axis	C-Ceramic						
6	Axis Material	C-Carbon						
7	Rubber	E-EPDM V-VITON						
8	Power Specifications	2:220V Single Phase 3:380V Phase						

Specification Table

Spec.	Inlet(mm)	Outlet(mm)	50Hz		60Hz		Power(w)
			Max.Head(m)	Max.Capacity(l/min)	Max.Head(m)	Max.Capacity(l/min)	
FMD-2020	20	20	3	26	5	29	20
FMD-2045	20	20	3.8	31	5.1	39	45
FMD-2065	20	20	4.5	45	6.8	53	65
FMD-25120	25	25	5.6	60	8.1	66	120
FMD-25150	25	25	6.9	85	9.4	98	150
FMD-25260	25	25	8.8	120	13.7	120	260

Installation Size Table

Model	A	B	C	D	E	F	G	H	I	J	K	L
FMD-2010	22	39	54	50	68	95	92	55	180	\	G3/4	G3/4
FMD-2020	31	40	61	50	68	85	107	55	211	30	G3/4	G3/4
FMD-2045	31	47	67	65	100	120	136	61	247	41	G3/4	G3/4
FMD-2065	31	47	67	65	100	120	136	61	247	41	G3/4	G3/4
FMD-25120	41.5	60.5	89.5	75	100	120.5	165	64.5	272	45	G1	G1
FMD-25150	43	52	89.5	60	110	130	141.5	65	257.5	40	G1	G1
FMD-25260	43.5	65	100	100	108	156	148.5	72.5	325.6	70	G1	G1

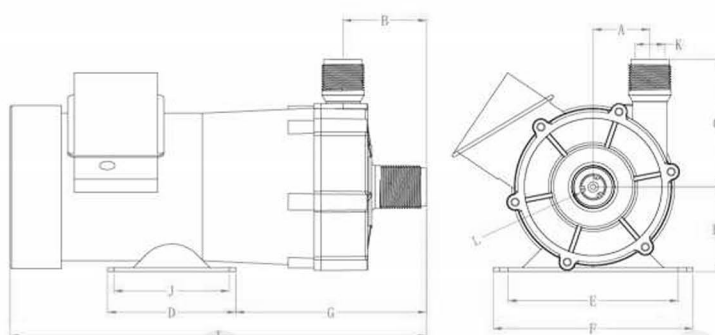

Installation size diagram

